


STOP SIGN (R1-1)

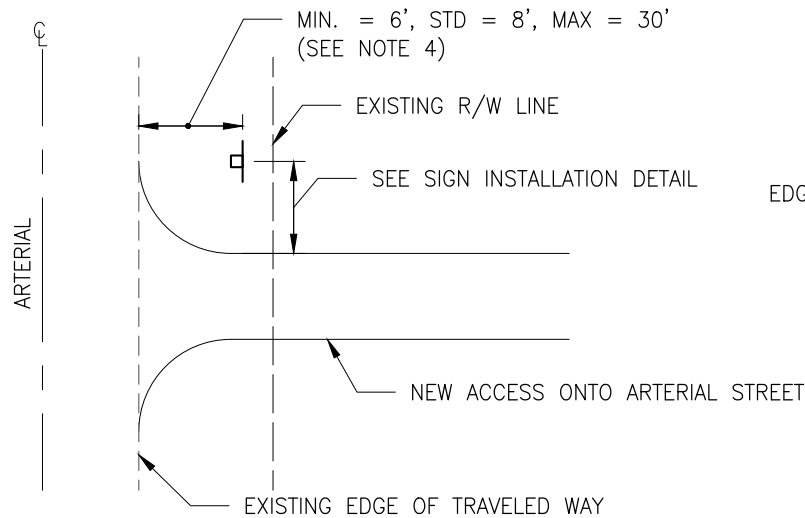


SIGN PLACEMENT

NOTES:

1. ALL MATERIAL AND WORKMANSHIP SHALL CONFORM TO THE LATEST WSDOT STANDARD PLAN AND STANDARD SPECIFICATIONS, SECTION 9-28. SIGN FACE MATERIAL SHALL BE HIGH INTENSITY SHEETING.
2. SIGNS SHALL BE VISIBLE ON THE APPROACHING ROADWAY FROM THE MINIMUM DISTANCES SHOWN IN THE FOLLOWING TABLE:

SPEED LIMIT (MPH)	VISIBILITY DISTANCE (FEET)
25	240
30	295
35	350
40	415
45	485

3. ALL CLEARING WITHIN CITY RIGHT-OF-WAY TO MAKE THE SIGN VISIBLE IS THE RESPONSIBILITY OF THE APPLICANT. APPROVED ROAD CONSTRUCTION PLANS OR A PERMIT FROM THE CITY IS NECESSARY BEFORE WORK COMMENCES.
4. VARIATION FROM THIS LOCATION BY WRITTEN APPROVAL OF THE CITY TRANSPORTATION ENGINEER.

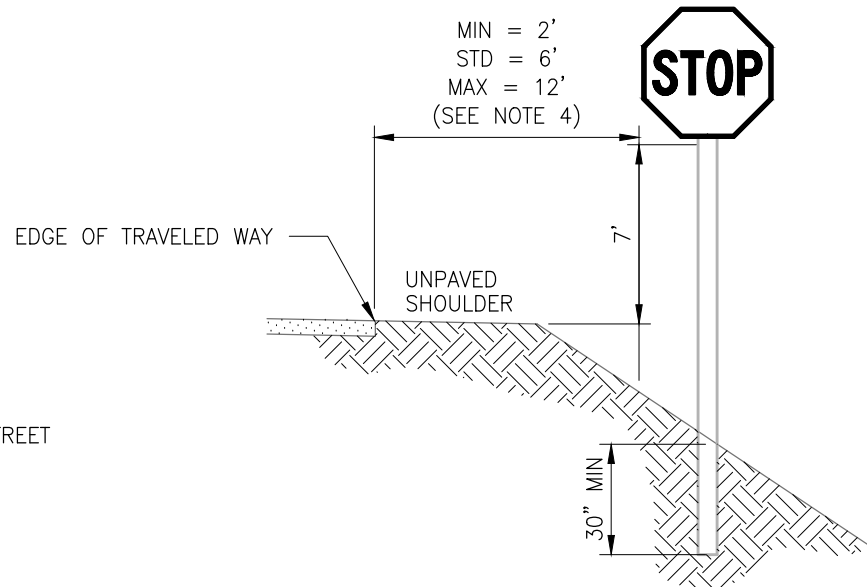

SIGN INSTALLATION DETAIL

NOT TO SCALE



**CITY OF DES MOINES
PUBLIC WORKS DEPARTMENT**

ENGINEERING SERVICES
21650 11TH AVENUE SOUTH
DES MOINES, WA 98198



STOP SIGN INSTALLATION

DM.E2.1

REVISED: 02/23